




Routing over Bursty Wireless Links

Muhammad Hamad Alizai, Olaf Landsiedel, Jó Ágila Bitsch Link, Stefan Goetz, Klaus Wehrle

<http://ds.cs.rwth-aachen.de>

hamad.alizai@rwth-aachen.de


Motivation

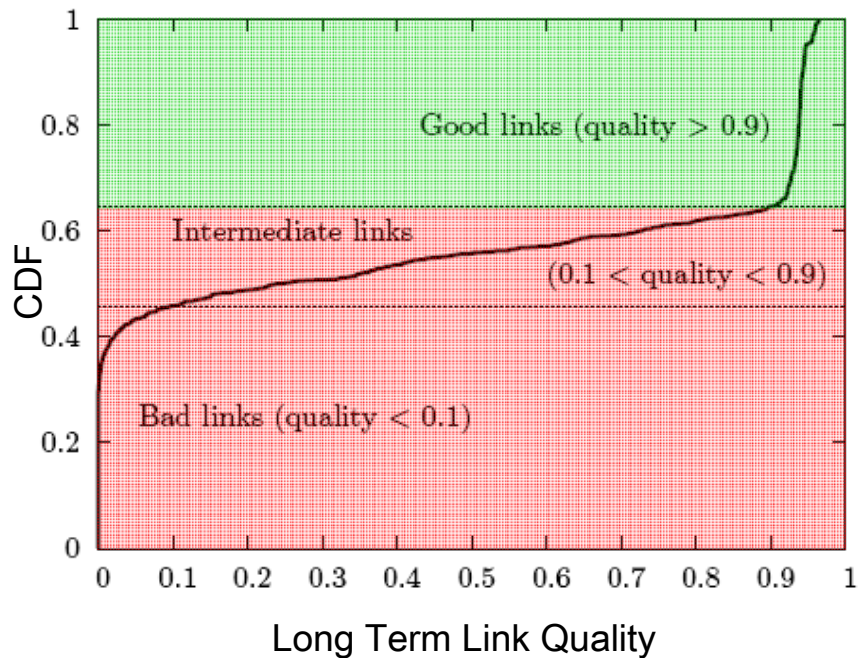

- **Accurate link estimation – a prerequisite for efficient routing**
- **Existing approaches**
 - ▶ Link estimation based on Long Term Link Quality
 - ▶ Routing protocols only utilize good links for packet forwarding
- **Intermediate links are Bursty**
 - ▶ Stable in the short term

Intermediate links can be used for packet forwarding


Motivation

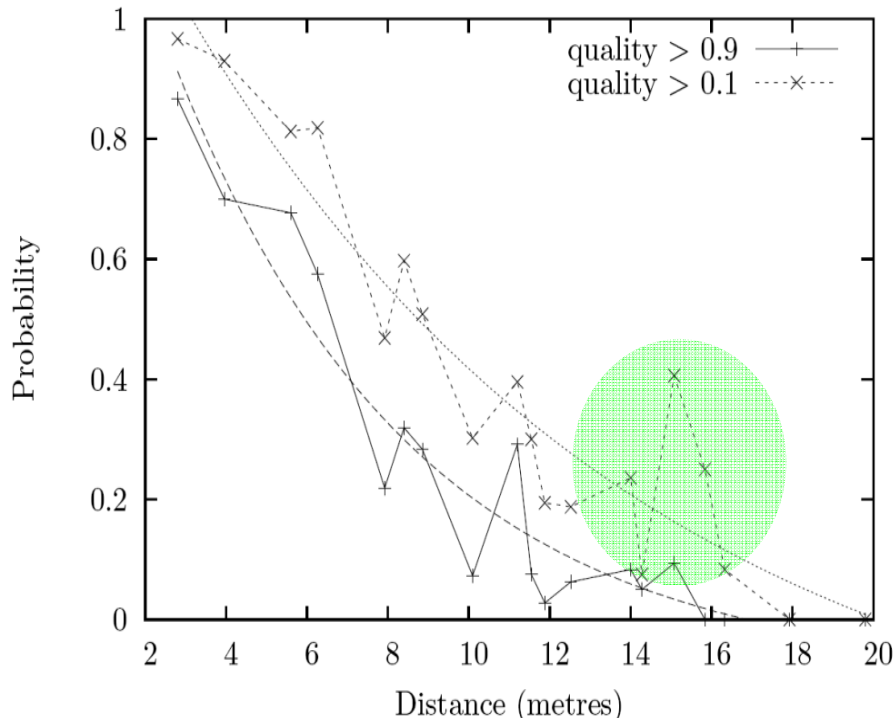


- **Why intermediate links**
 - ▶ Often long distance
 - ▶ Reduce routing hop count
 - ▶ Save transmission energy
 - ▶ Increase routing throughput
 - ▶ Analogous traffic patterns and link characteristics
- **Our Contribution**
 - ▶ Bursty traffic over bursty links
 - ▶ A mechanism to deal with unstable connectivity
- **Challenges**
 - ▶ How to identify reliable / stable periods of transmission?

Outline

- Motivation
- Basic Concept
- **Bursty Routing Extensions**
 - ▶ Short Term Link Estimation
 - ▶ Adaptive Routing Strategy
- Evaluation
- Conclusion

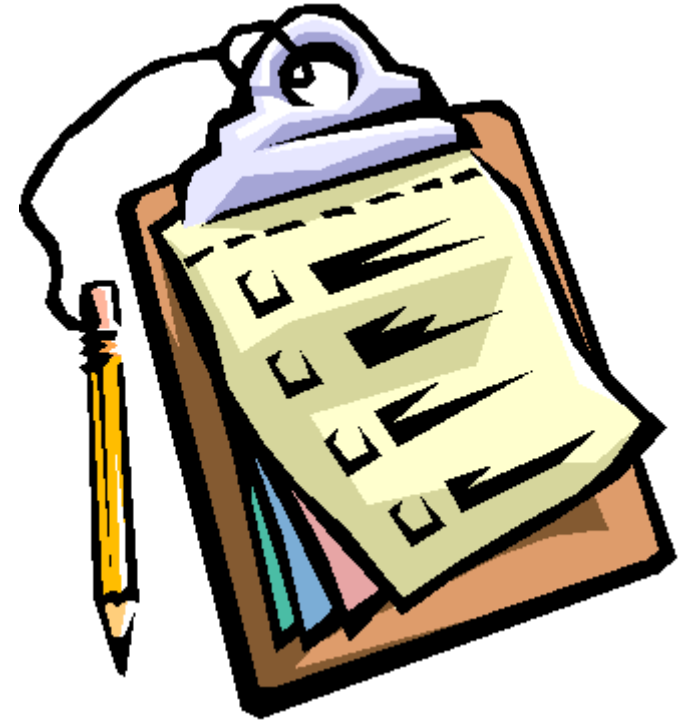

Basic Concept

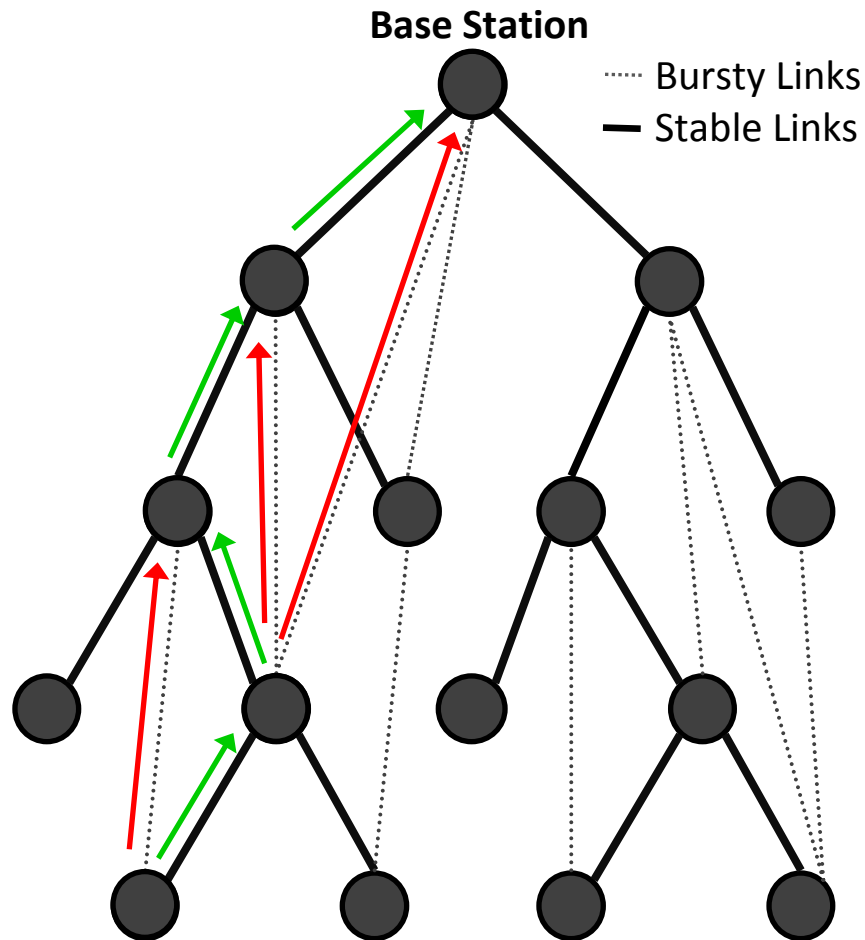

- **Routing Protocols in WSNs**
 - ▶ Collection trees based on ETX
 - ▶ $S \rightarrow 1 \rightarrow 2 \rightarrow 3 \rightarrow D = \text{min. } 4 \text{ Tx}$
- **What if $S \rightarrow 2$ or $1 \rightarrow 3$ or $1 \rightarrow D$ becomes temporarily reliable?**
 - ▶ $S \rightarrow 2 \rightarrow 3 \rightarrow D$ or $S \rightarrow 1 \rightarrow D$
 - Save up to 2 transmissions per packet
 - ▶ Traditional routing schemes do not use such opportunities

We need Short Term Link Estimation for intermediate links


Bursty Routing Extensions - BRE

- **Short Term Link Estimation - STLE**

- ▶ Identify reliable transmission periods in intermediate links
- ▶ Based on data-packet overhearing
- ▶ Quality proportionate to data exchange rates
- ▶ Receiver determines successful burst and notify sender

- **Adaptive Routing Strategy**

- ▶ Change parent temporarily
 - Ensures stability
- ▶ Do not inform descendent nodes
 - Ensures reliability
- ▶ Regress to traditional routing
 - Bursty link becomes unreliable
 - Ensures reliability

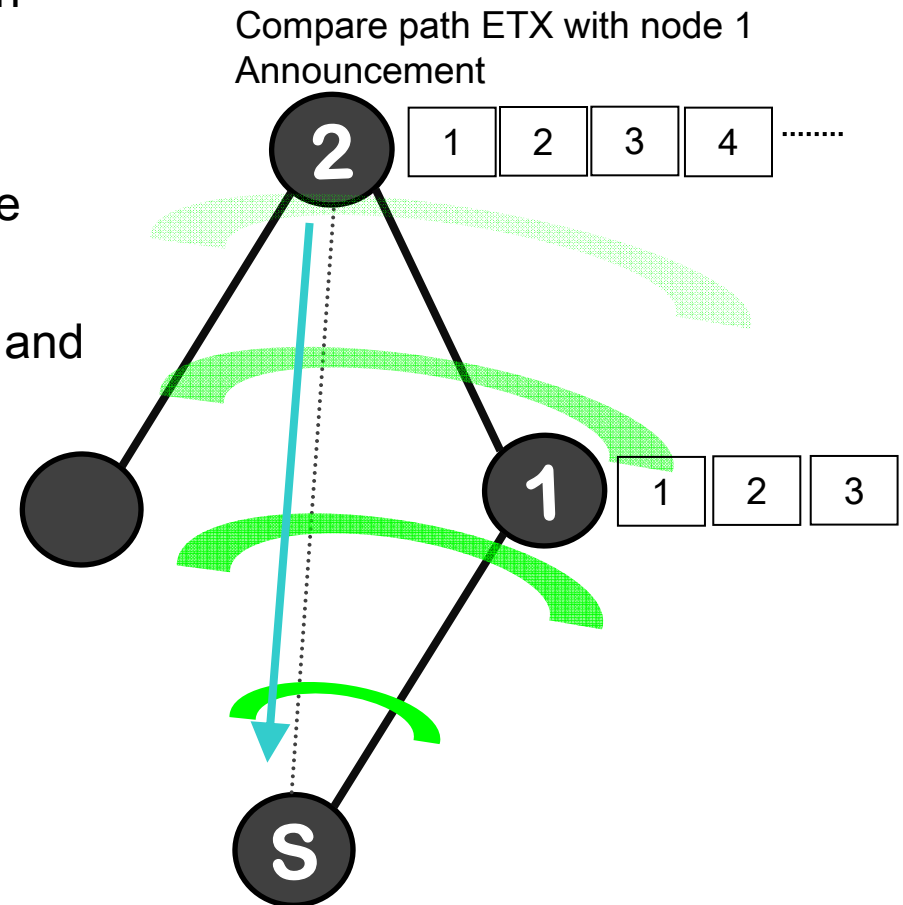


Evaluation

- **Implementation and Integration of BRE with CTP**
- **Outline**
 - ▶ STLE thresholds
 - ▶ Transmission cost
 - ▶ Burst lengths
- **Testbeds: MoteLab, TWIST, Customary**
 - ▶ Node Density: 10 to 30
 - ▶ Network size: 21 to 138
- **Some Initial Results**
 - ▶ Lower path ETX than original *parent*: > 50% neighbors
 - ▶ Overhearing nodes: 90%




STLE Thresholds

- When to declare a bursty link as active
 - ▶ Corresponding transmission *history*

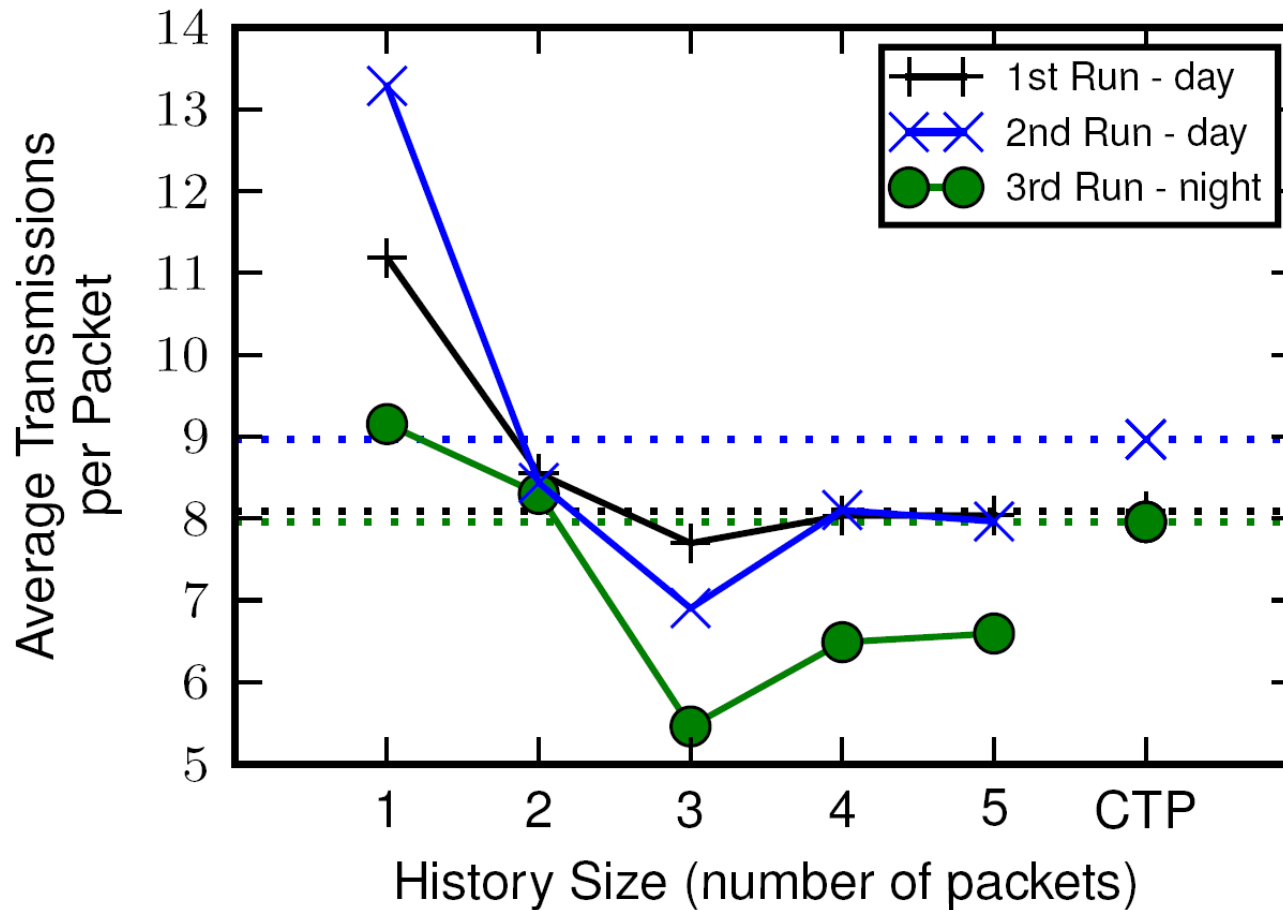


Transmission Cost and Reliability

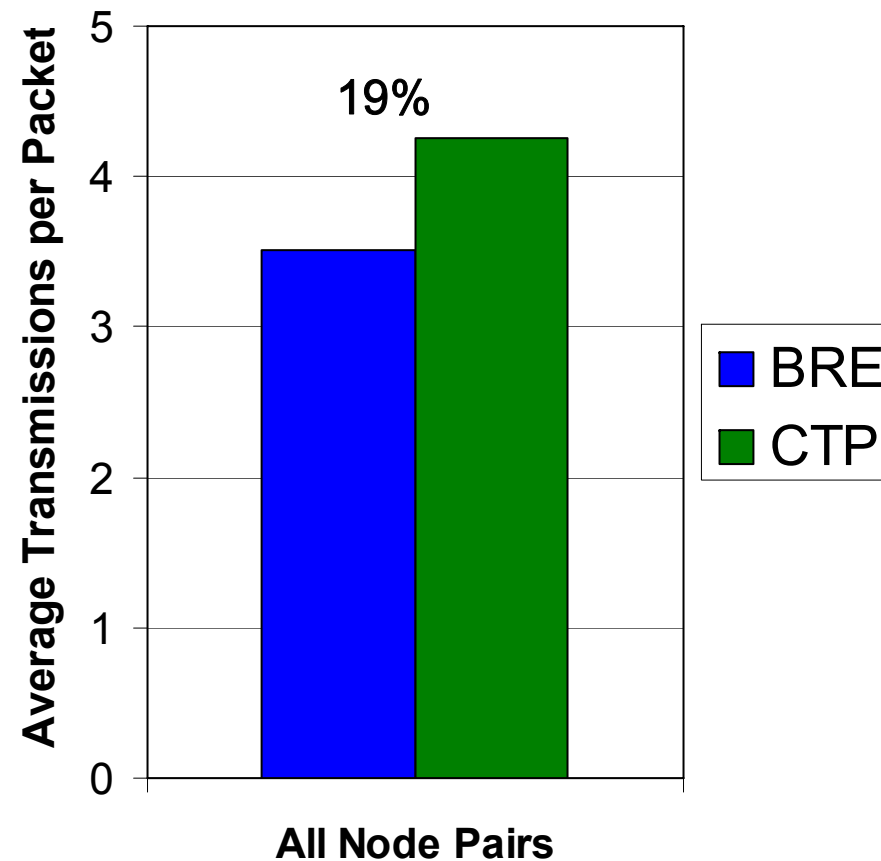


- ▶ State: 30 neighbor entries
- ▶ Inter packet interval = 250 ms
- ▶ Transmission power = 0 dBm
- ▶ Each experiment repeated five times
- ▶ Throughput increase: ~10%

Transmission Cost and Reliability

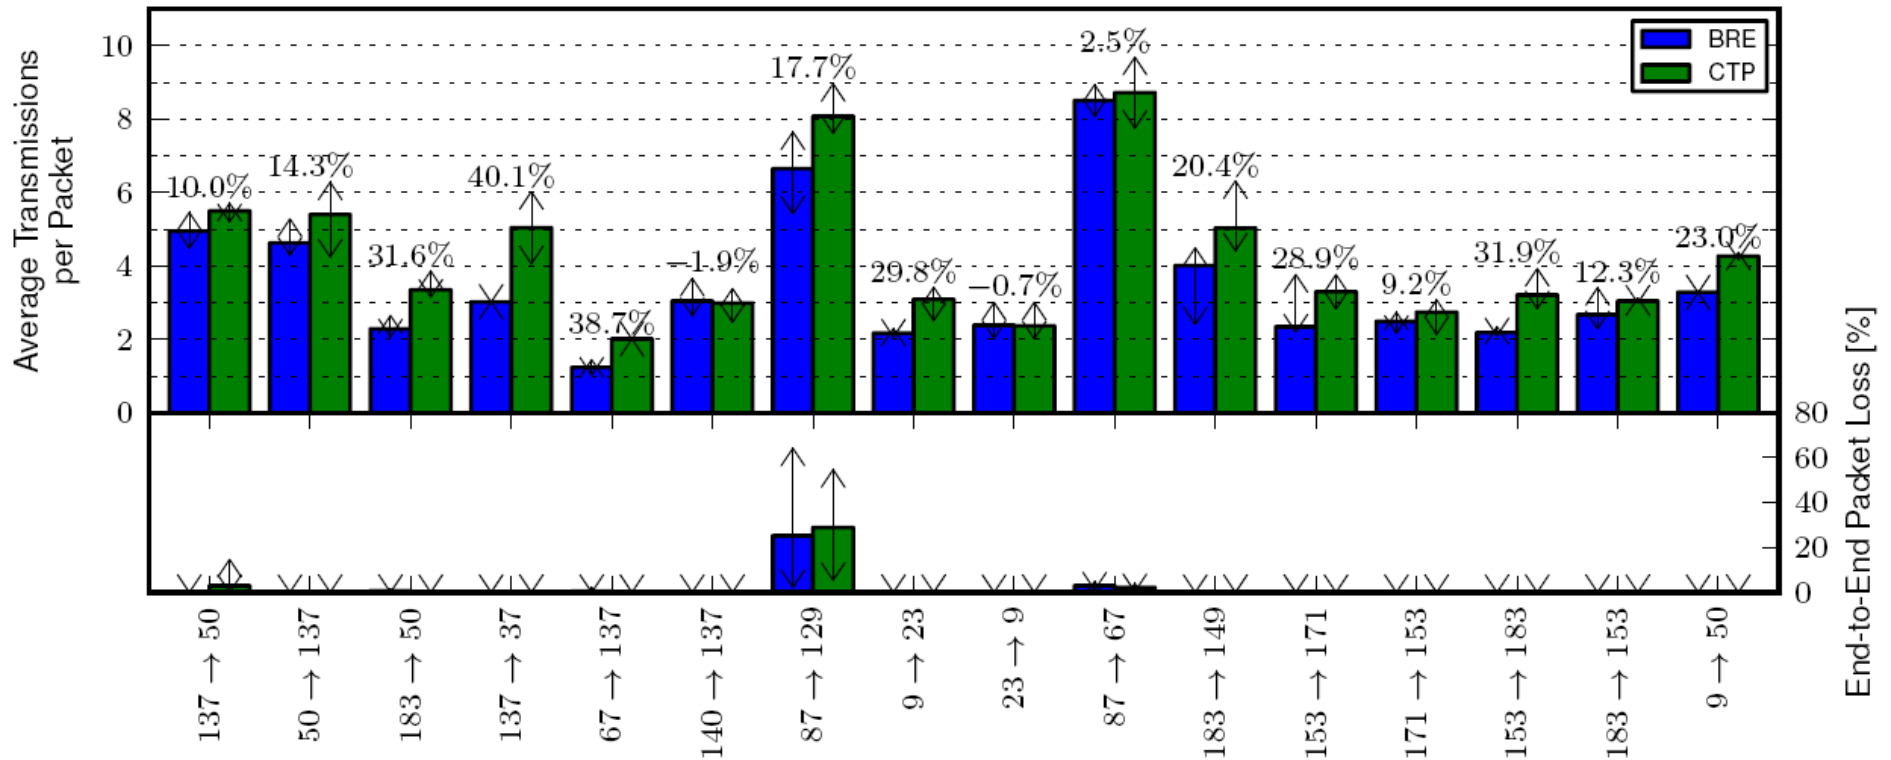

- ▶ State: 30 neighbor entries
- ▶ Inter packet interval = 250 ms
- ▶ Transmission power = 0 dBm
- ▶ Each experiment repeated five times
- ▶ Throughput increase: ~10%

CDF – Burst Lengths

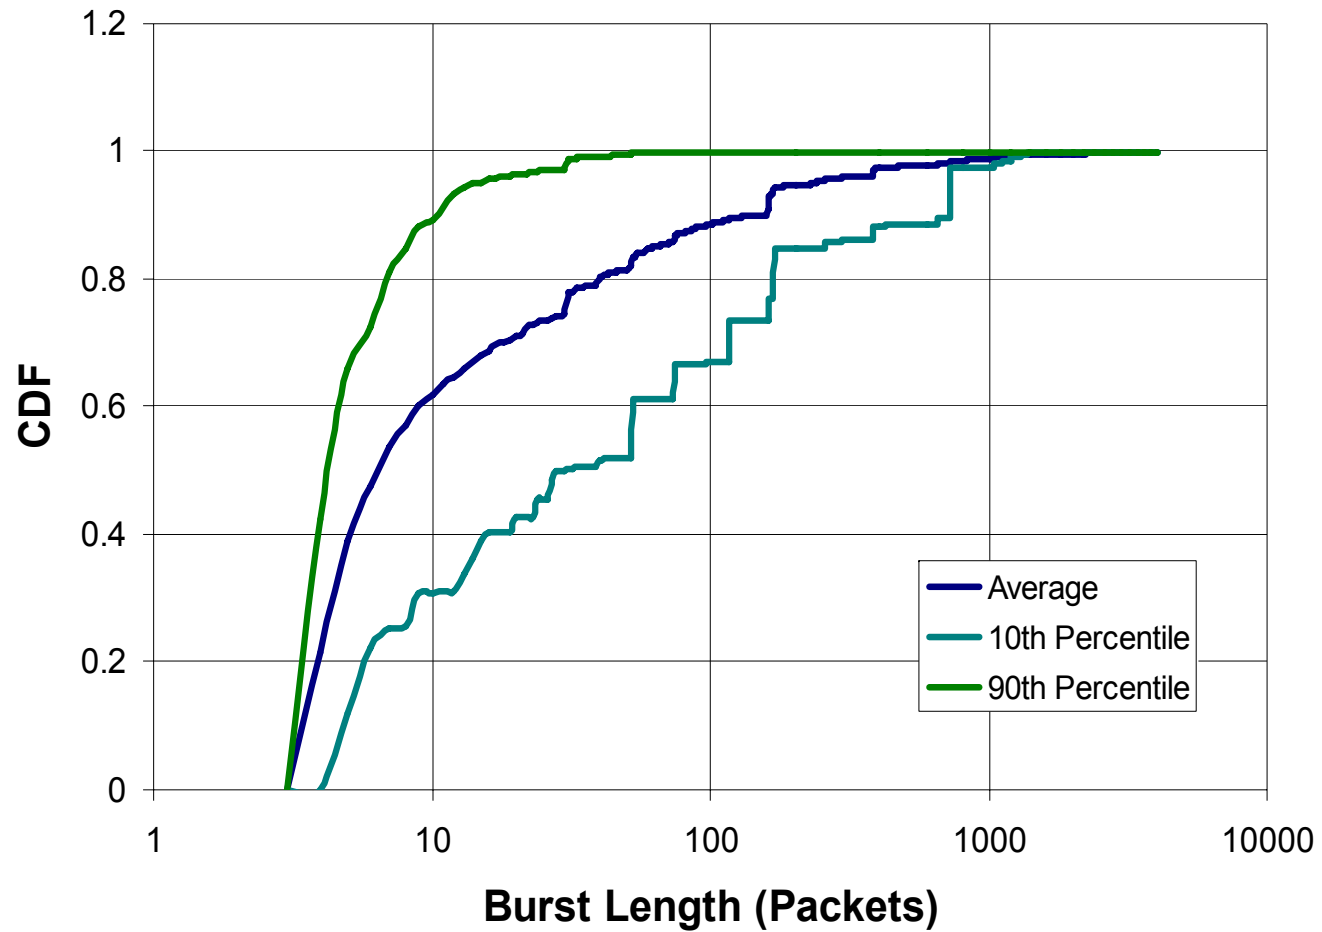

Conclusion

- **Contribution**


- ▶ Intermediate links can be used for packet forwarding
- ▶ BRE - a simple approach for utilizing Intermediate Links
- ▶ Generalizes across most existing routing protocols

- **Results**

- ▶ Significant Improvements – yet not tremendous
- ▶ Considering high loss rates in intermediate links

- **Future Work**

- ▶ Classifying overhearing nodes
- ▶ Extension towards 802.11
- ▶ Integration with low power listening

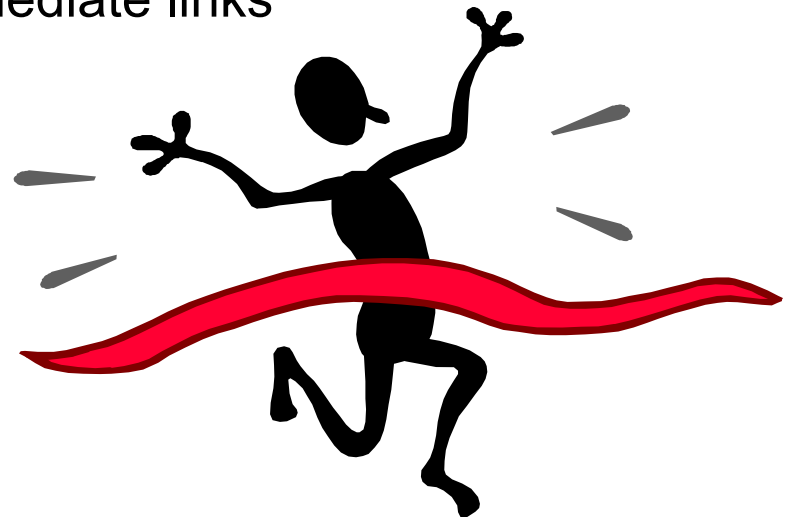

Questions ... ?

<http://ds.cs.rwth-aachen.de>

hamad.alizai@rwth-aachen.de